

Sunny Apex

100W Solar Module

High Efficiency Back-Contact

- ☺ Sunny Apex's HOP series solar modules ranged from 30Watt to 150Watt
- Aesthetically using clear surface back-contact cells
- ☺ Cells with High conversion efficiency up to 23%
- Anodized aluminum improving corrosion resistance
- ☺ Excellent performance under low light conditions

*** Your best choice for off-grid solar application ! ***



Electrical Specifications

Model Type	SA-H100	SA-H95
Peak Power (Pmax)	100W	95W
Module Efficiency	18.30%	17.40%
Maximum Power Voltage (Vmp)	17.9V	17.9V
Maximum Power Current (Imp)	5.59A	5.31A
Open Circuit Voltage (Voc)	21.6V	21.6V
Short Circuit Current (Isc)	6.15A	5.91A
Power Tolerance	-5% / + 10%	
Maximum System Voltage	70V	
Normal Operating Cell Temp.	46 °C (+/- 2)	

Mechanical Specifications


Cell type	Back contact high eff. Mono
Number of cells	32 cells in series
Weight	7.1kg [15.65lbs]
Dimensions	1037 x 527 x 35mm [40.86 x 20.76 x 1.38in]
Frame	> 15 μ m clear anodized aluminum
Junction Box	JX18003F (IP 67 waterproof)
Cables	4.00mm ² , 900mm
Connectors	JBL01 /JBL02 (MC4 compatible)

Temperature Coefficients

Power	-0.32%/ °C
Voltage	-1.8mV/ °C

Warranties & Certifications

Warranties	2 years product warranty, 20 years limited power warranty of 80% of the minimum specified power rating
Certificates	CE

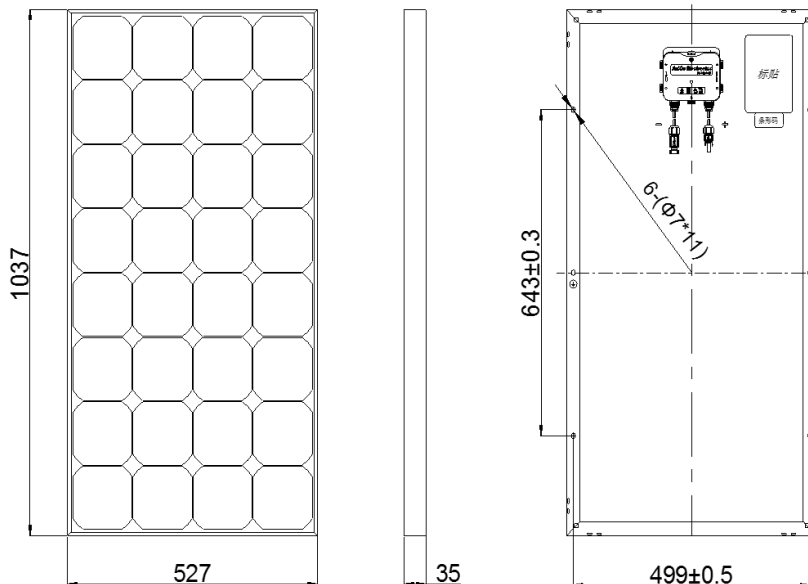

Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m², AM 1.5G, cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2015 Sunny Apex Development Ltd. All right reserved. Specifications included in this datasheet are subject to change without notice.