

# **120W Solar Module** High Efficiency Back-Contact

- **Sunny Apex's HOP series solar modules ranged from 35Watt to 175Watt**
- Aesthetically using clear surface back-contact cells
- Cells with High conversion efficiency above 24%
- Anodized aluminum improving corrosion resistance
- Excellent performance under low light conditions



## *Q* Your best choice for off-grid solar application ! *Q*

Electrical Specifications


Model Type	SA-H120
Peak Power (Pmax)	120W
Module Efficiency	22.00%
Maximum Power Voltage (Vmp)	19.8V
Maximum Power Current (Imp)	6.06A
Open Circuit Voltage (Voc)	23.2V
Short Circuit Current (Isc)	6.39A
Power Tolerance	-5% / + 10%
Maximum System Voltage	70V
Norminal Operating Cell Temp.	46 °C (+/- 2)

#### Mechanical Specifications

Cell type	Back contact high eff. Mono
Number of cells	32 cells in series
Weight	7.1kg [15.65lbs]
Dimensions	1037 x 527 x 35mm
	[40.86 x 20.76 x 1.38in]
Frame	$> 15 \mu m$ clear anodized aluminum
Junction Box	IP 65 waterproof
Cables	4.00mm <sup>2</sup> , 900mm
Connectors	MC4 compatible


### **Temperature Coefficients**

Power	-0.27%/°C
Voltage	-0.236%/°C
Current	0.058%/°C

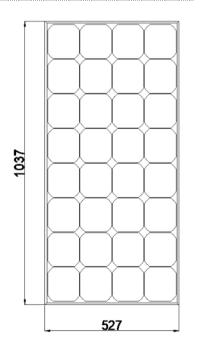

### Warranties & Certifiations

	2 years product warranty, 20 years limited power warranty of 80% of the mnimum specificed power rating
Certificates	CE

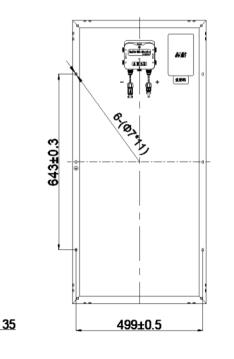

#### Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m2, AM 1.5G,cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2021 Sunny Apex Development Ltd. All right reserved. Specifications included in this datasheet are subject to change without notice.

## Sunny Apex Development Limited

Rm 1505, 15/F Star House, No. 3 Salisbury Rd, TST, KLN, Hong Kong | T: +852-6983 7178 F: +852-3186 2200 | info@sunnyapex.com

### www.sunnyapex.com